473-012







473-012

JOCKEY 500 UNIT 3 RIB - 10" DOUBLE ROAD SOLID PU WHEEL

SPECIFICATIONS - KEY FEATURES



MAKES WINDING BY HAND EASY & ALLOWS DRILL OPERATION

BOS LABEL

AUSTRALIAN QUALITY AND SERVICE

GREASE NIPPLE

12mm INPUT (NOT 1/2") UNIQUE SIZE GIVES ADDED SECURITY

PROVIDES GREASE TO BEARING AND THREAD

QUALITY AUSTRALIAN POWDER COATED

MACHINED LUGS FROM HEAVY WALLED PIPE

IN EQUAL SPACING FOR ADJUSTABLE HEIGHT

GUIDE BUSH

FOR RIGIDITY OF THE INNER TUBE & SEAL OUT MOISTURE/DUST

LOCKING SLOT FOR TRAVELING

OUICK RELEASE LYNCH PIN

DOUBLE BALL BEARING

CURVED, OFFSET WHEEL BRACKET FOR EXCELLENT TURNING RESPONSE

HEAVY DUTY MOULDED PLASTIC HUB

10" (250mm) SOLID DENSE PU WHEEL WITH MOULDED TREAD




- IDEAL FOR SINGLE CLAMPS
- IDEAL FOR SINGLE CLAMPS WITH 2 OR 3 SLOTS IN THEM
- THE ROAD PU TYRE GREAT FOR CONCRETE, GRASS AND SANDY SURFACES
- ALSO YOU WILL NEVER HAVE TO PUMP THEM UP
- ADDITIONAL EXTENSIONS AVAILABLE 120mm





473-012 JOCKEY 500 UNIT 3 RIB - 10" DOUBLE ROAD SOLID PU WHEEL

EXTENSION DETAILS - LOWER LUG POSITION

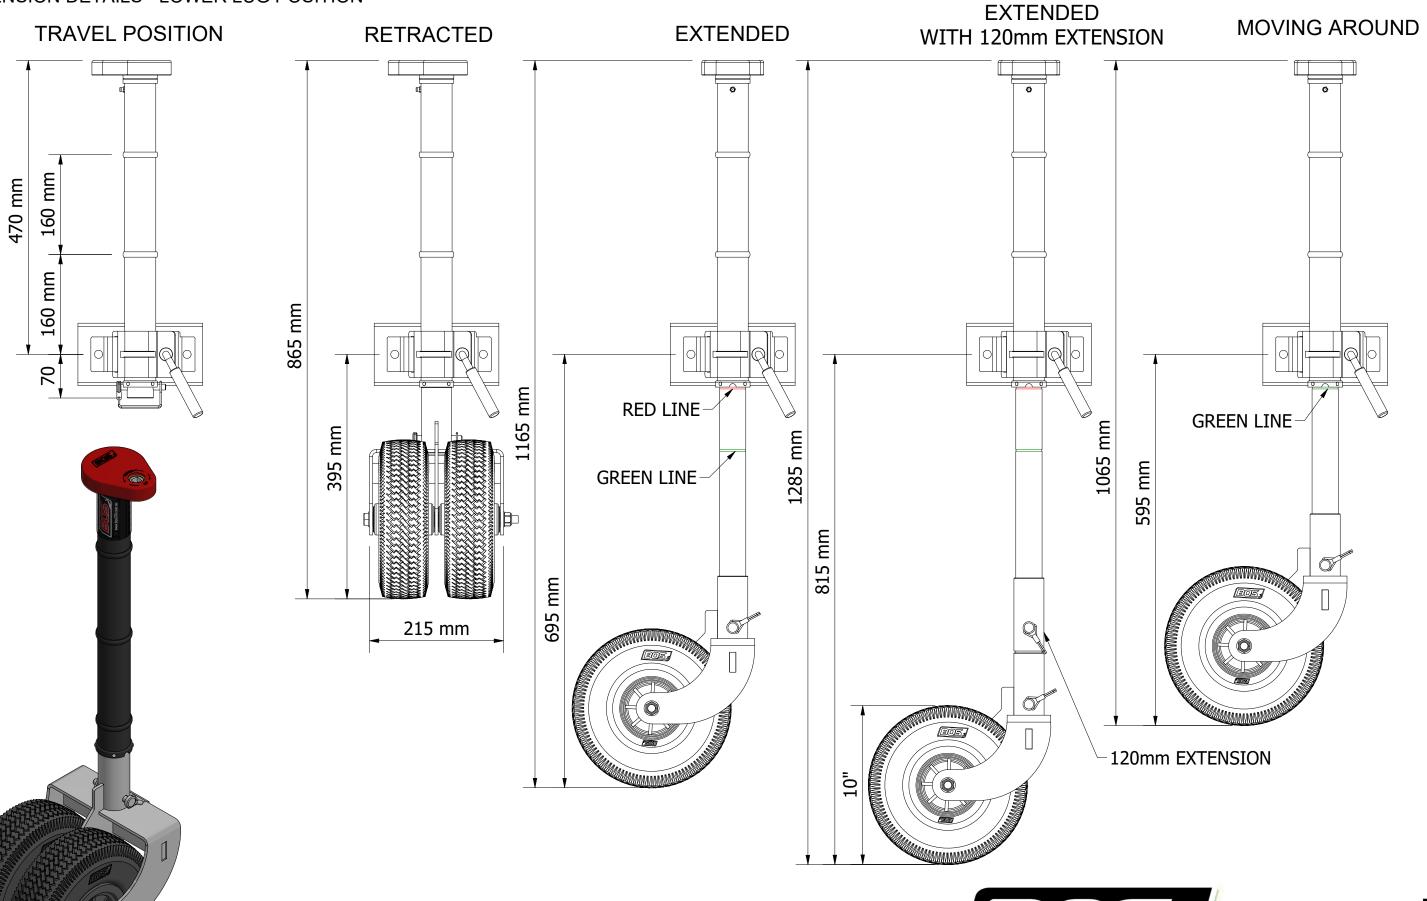





JOCKEY 500 UNIT 3 RIB

MAXIMUM LIFT DETAILS

